

Datasheet for #sbcw1979 DN

Recommendations:

Please read the starter kit user manual (at least installation chapter 5), if available, and have a look at the FAQ at <http://www.alpeslasers.ch/alfaq.pdf>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To use with a power-supply ILX Lightwave LDX-3232 or equivalent.



Figure 1: Support mounting for #sbcw1979 DN (please note that the laser is connected to the DN pad drawn in blue)

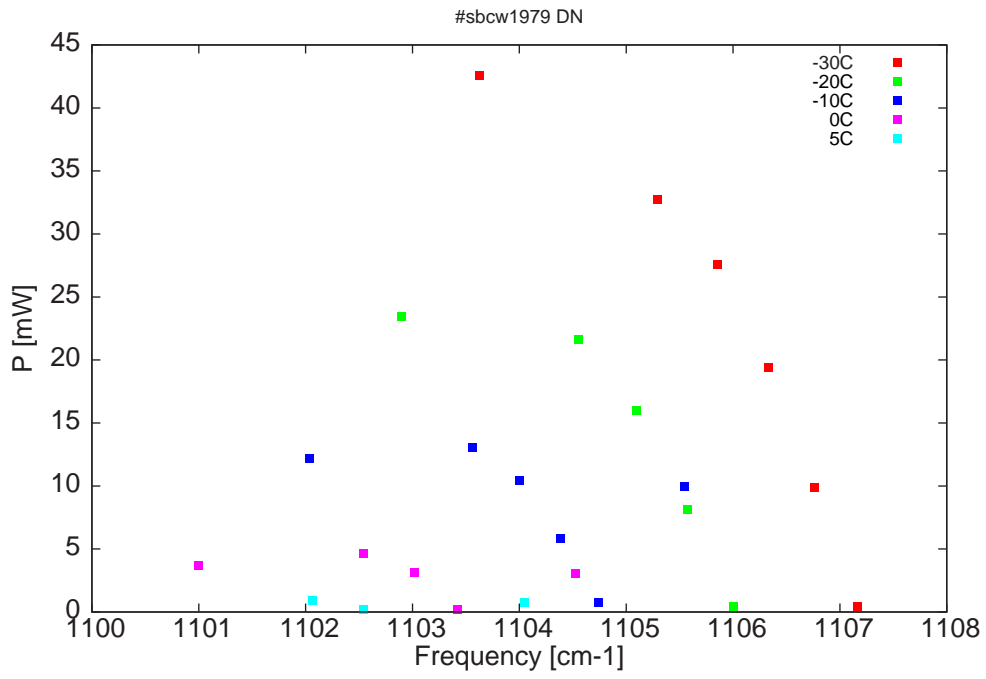


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

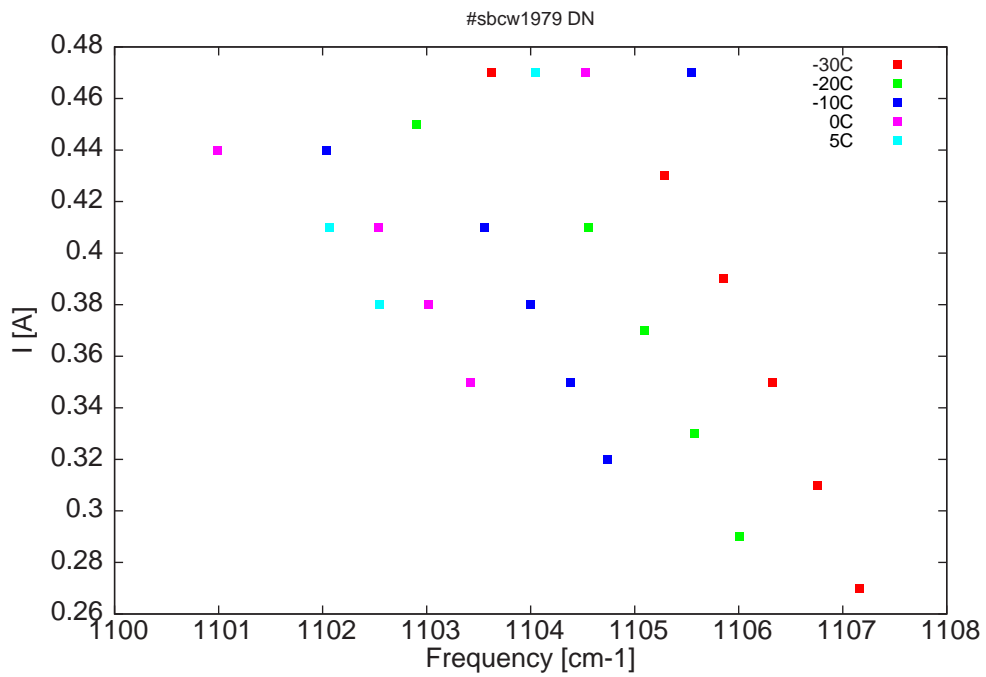


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm ⁻¹]	P[mW]	Temp[°C]	U_{LASER} [V]	I[A]
9032.1	1107.2	0.5	-30	7.8	0.27
9035.4	1106.8	9.9	-30	8.1	0.31
9038.9	1106.3	19.4	-30	8.4	0.35
9042.8	1105.9	27.6	-30	8.7	0.39
9047.4	1105.3	32.7	-30	9	0.43
9061	1103.6	42.6	-30	9.4	0.47
9041.6	1106	0.4	-20	7.9	0.29
9045.1	1105.6	8.1	-20	8.2	0.33
9049	1105.1	16	-20	8.5	0.37
9053.4	1104.6	21.7	-20	8.8	0.41
9067	1102.9	23.5	-20	9.2	0.45
9051.9	1104.7	0.7	-10	8.1	0.32
9054.8	1104.4	5.8	-10	8.3	0.35
9058	1104	10.4	-10	8.5	0.38
9061.6	1103.6	13.1	-10	8.8	0.41
9074.1	1102	12.2	-10	9.1	0.44
9045.3	1105.5	9.9	-10	9.4	0.47
9062.7	1103.4	0.2	0	8.3	0.35
9066.1	1103	3.1	0	8.5	0.38
9070	1102.5	4.6	0	8.8	0.41
9082.7	1101	3.7	0	9.1	0.44
9053.7	1104.5	3	0	9.3	0.47
9069.9	1102.5	0.2	5	8.5	0.38
9073.9	1102.1	0.9	5	8.8	0.41
9057.6	1104	0.7	5	9.3	0.47

Table 1 : singlemode optical output power as function of operating parameters

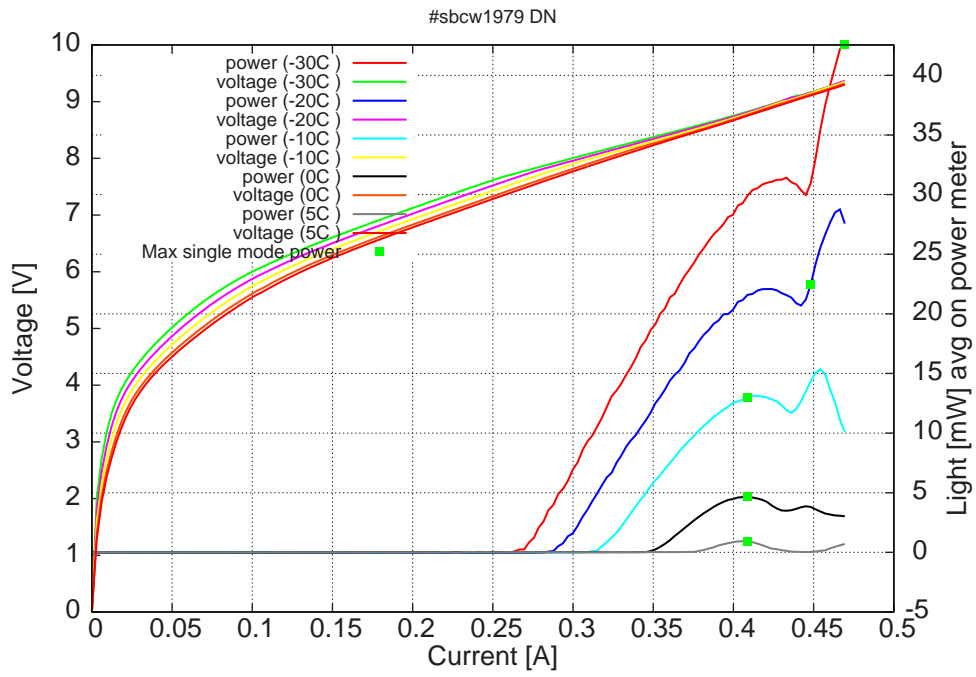


Figure 4: peak voltage and average power vs peak current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -30C: $I_{th}=270\text{mA}$ / $V_{th}= 7.8\text{V}$ (2-wires measurements). Maximum operation current: 470mA for all temperatures.

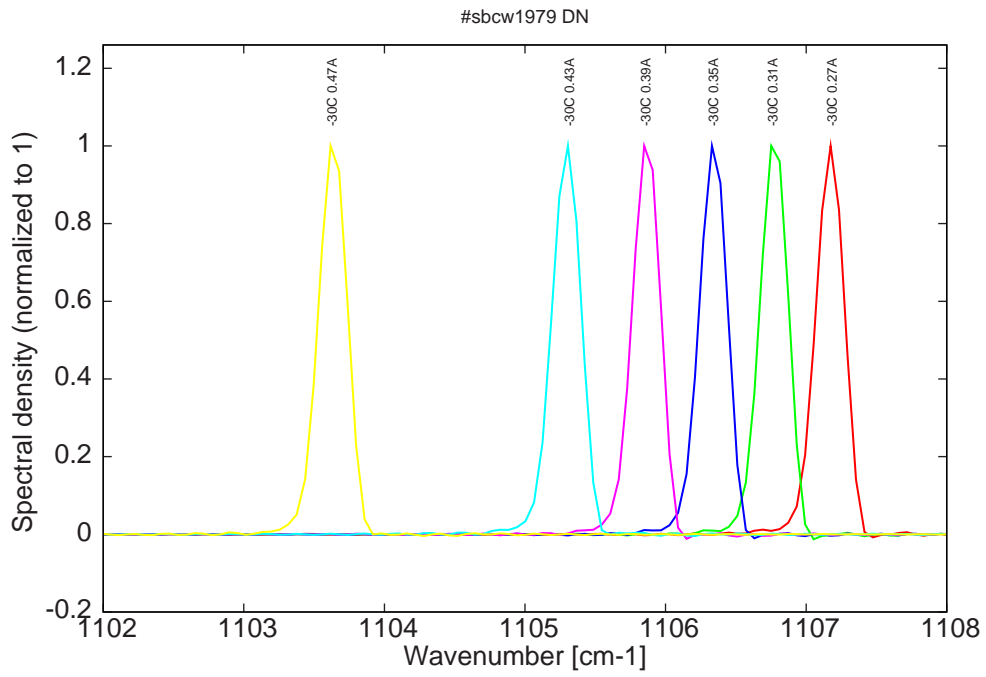


Figure 5: spectra at -30C for various DC currents (mode jumping for $I > 0.43A$, see Fig. 3)

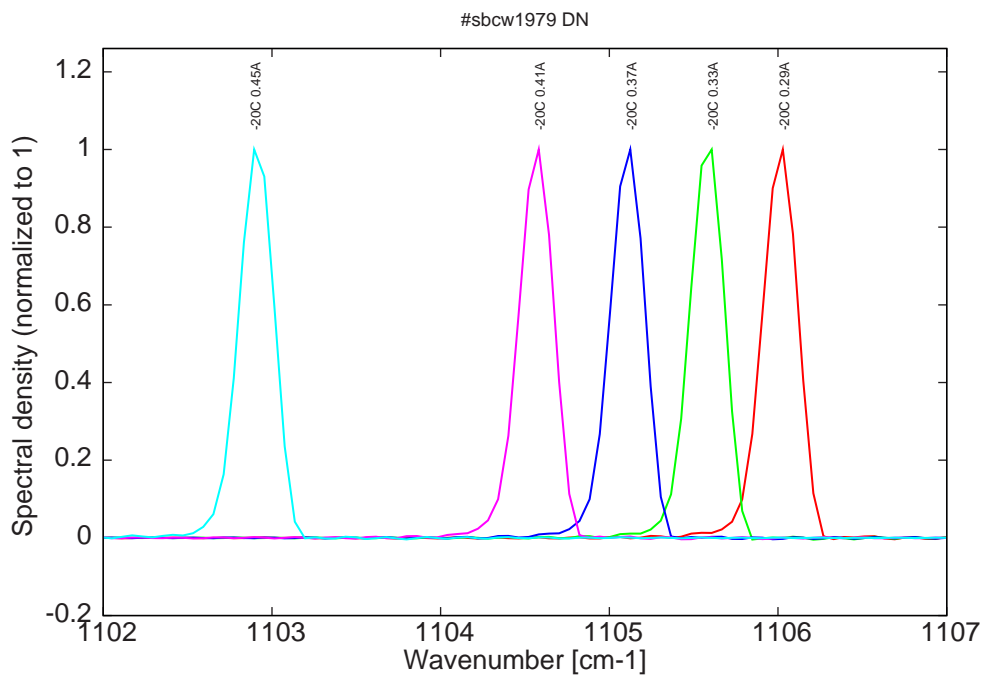


Figure 6: spectra at -20C for various DC currents (mode jumping for $I > 0.41A$, see Fig. 3)

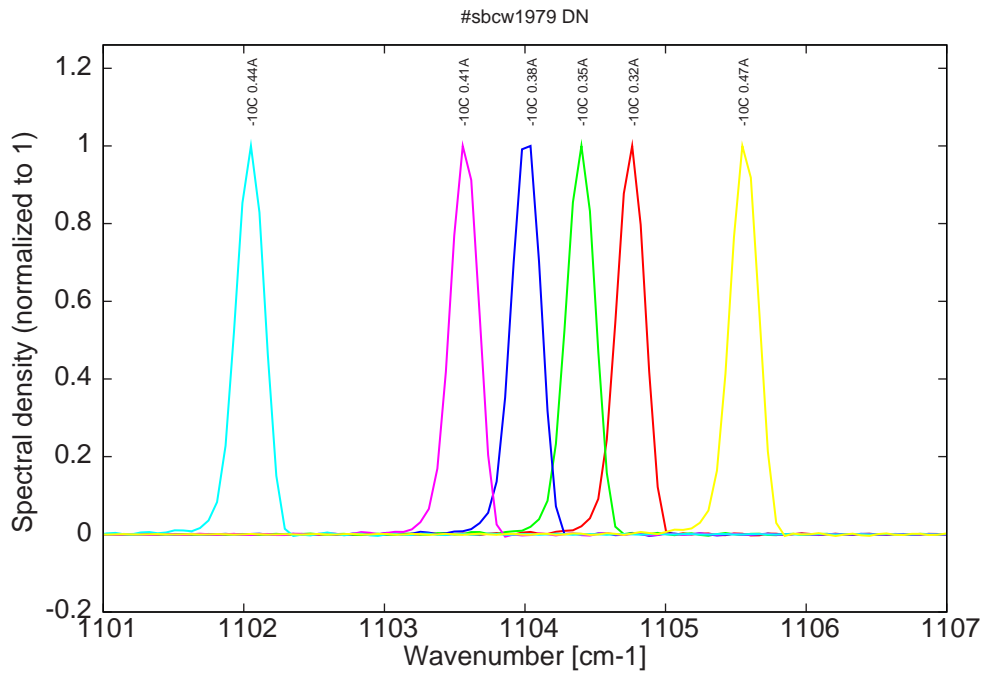


Figure 7: spectra at -10C for various DC currents (mode jumping for $I > 0.41A$, see Fig. 3)

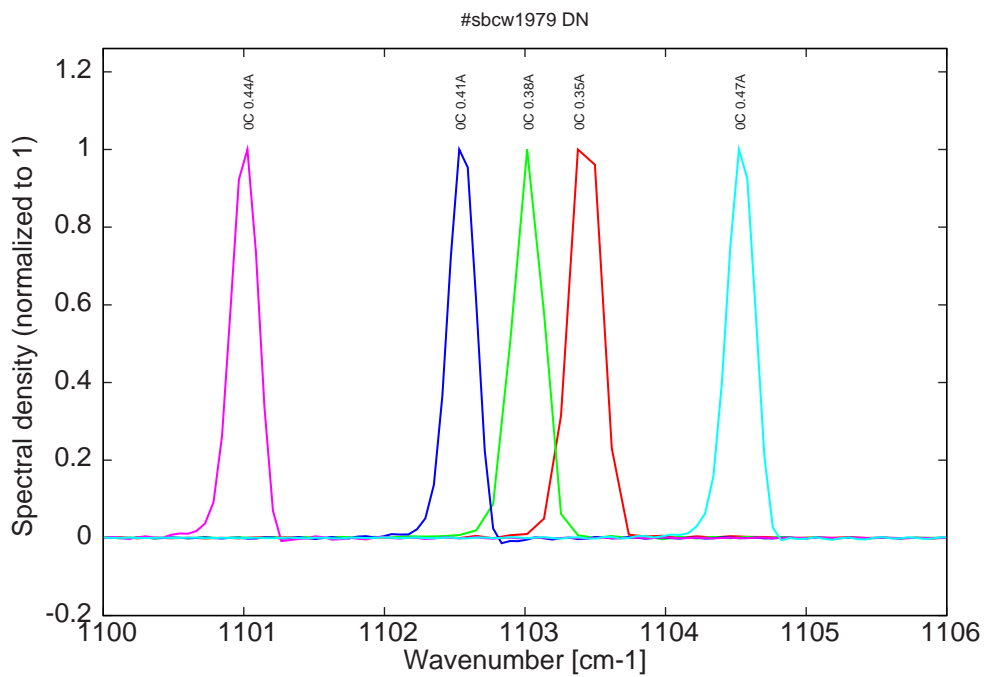


Figure 8: spectra at 0C for various DC currents (mode jumping for $I > 0.41A$, see Fig. 3)

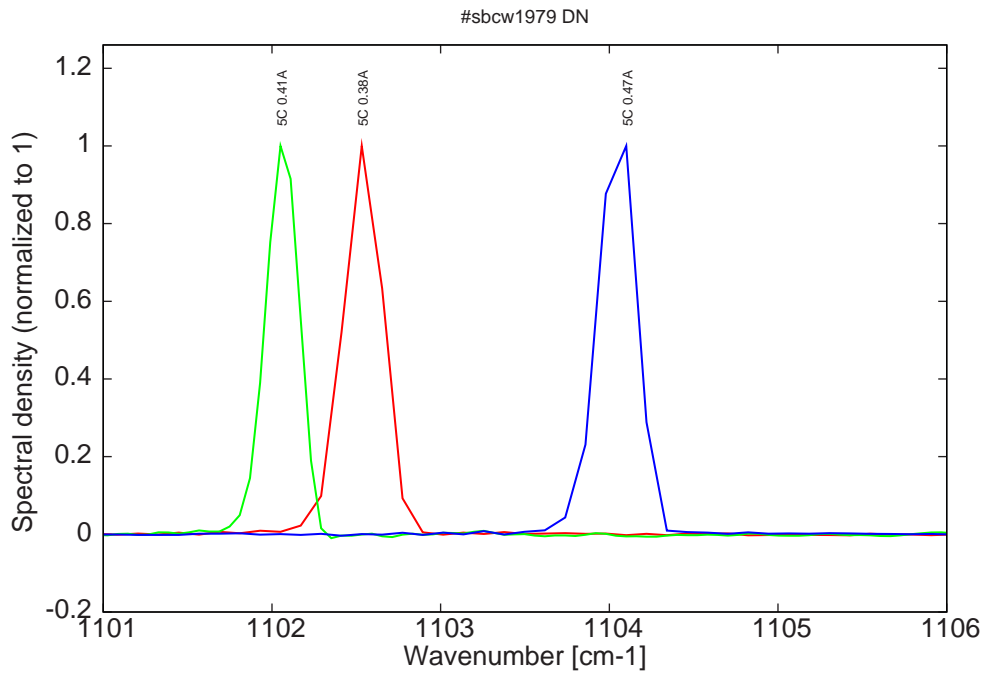


Figure 9: spectra at 5C for various DC currents (mode jumping for $I > 0.41A$, see Fig. 3)