

Datasheet for #sb3007 DN

Recommendations:

Please read the starter kit user manual, if available, and have a look at the FAQ at <http://www.alpeslasers.ch/alfaqa.pdf>

WARNING: Operating the laser with longer pulses, higher repetition rate, higher voltage or higher current than specified in this document may cause damage. It will result in loss of warranty, unless agreed upon with Alpes Lasers!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative bias on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive bias on the base contact (= submount, corresponding to the label "base" on the LLH).

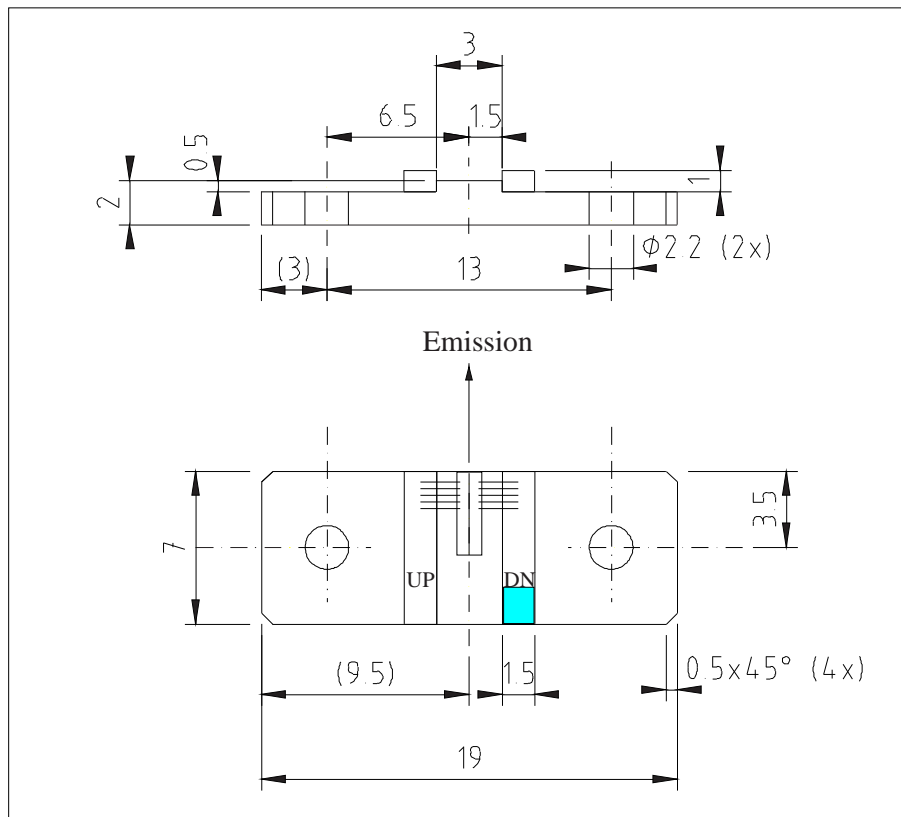


Figure 1: Support mounting for #sb3007 DN (please note that the laser is connected to the DN pad drawn in blue)

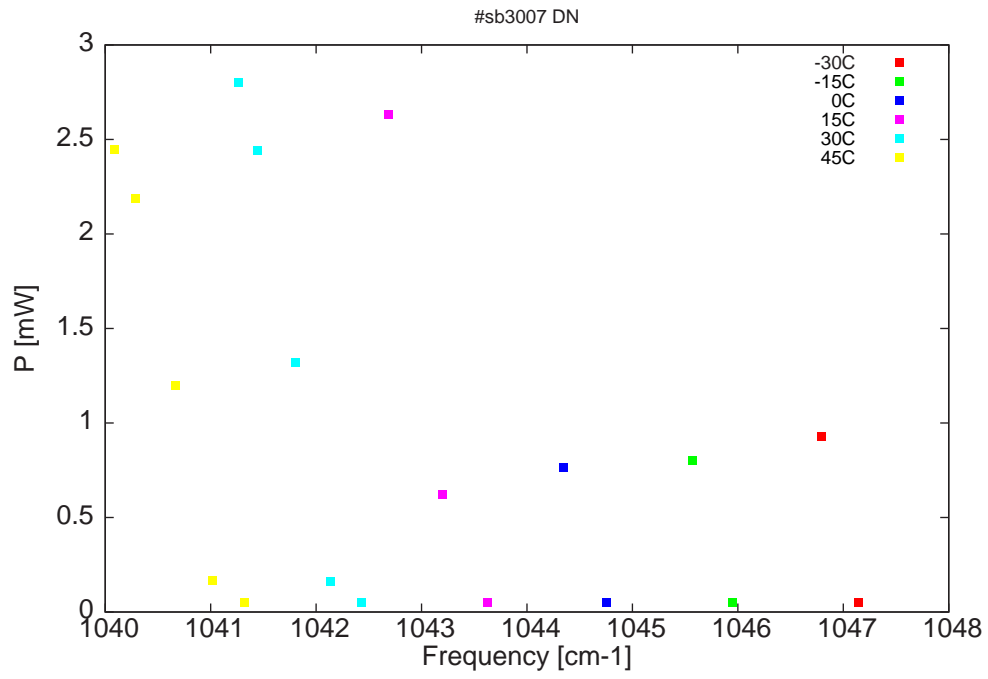


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

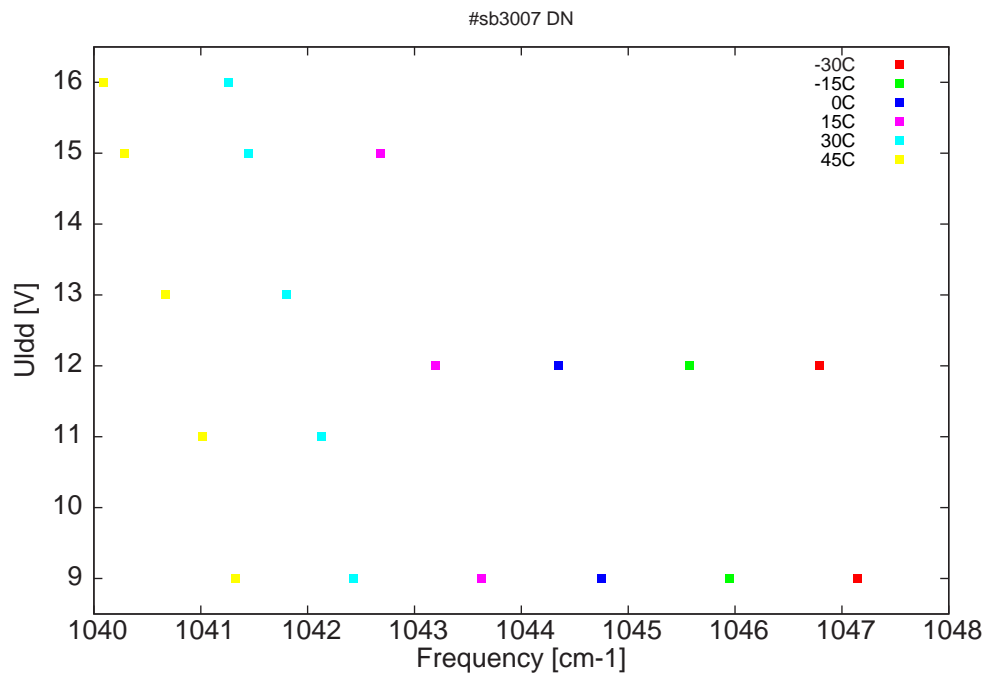


Figure 3: DC voltage fed to LDD (U_{ldd}) as a function of the singlemode emission frequencies and temperatures

λ [nm]	ν [cm ⁻¹]	P[mW]	Temp[°C]	U_{LDD} [V]	I_{pulse} [A]
9549.8	1047.1	0.1	-30	9	0.37
9553	1046.8	0.9	-30	12	0.73
9560.7	1046	0.1	-15	9	0.44
9564.1	1045.6	0.8	-15	12	0.79
9571.7	1044.8	0.1	0	9	0.46
9575.3	1044.3	0.8	0	12	0.86
9582	1043.6	0.1	15	9	0.55
9585.9	1043.2	0.6	15	12	0.93
9590.6	1042.7	2.6	15	15	1.3
9593	1042.4	0.1	30	9	0.58
9595.7	1042.1	0.2	30	11	0.84
9598.7	1041.8	1.3	30	13	1.12
9602	1041.4	2.4	30	15	1.38
9603.8	1041.3	2.8	30	16	1.49
9603.2	1041.3	0.1	45	9	0.63
9606	1041	0.2	45	11	0.9
9609.2	1040.7	1.2	45	13	1.19
9612.8	1040.3	2.2	45	15	1.45
9614.5	1040.1	2.4	45	16	1.55

Table 1 : singlemode optical output power as function of operating parameters

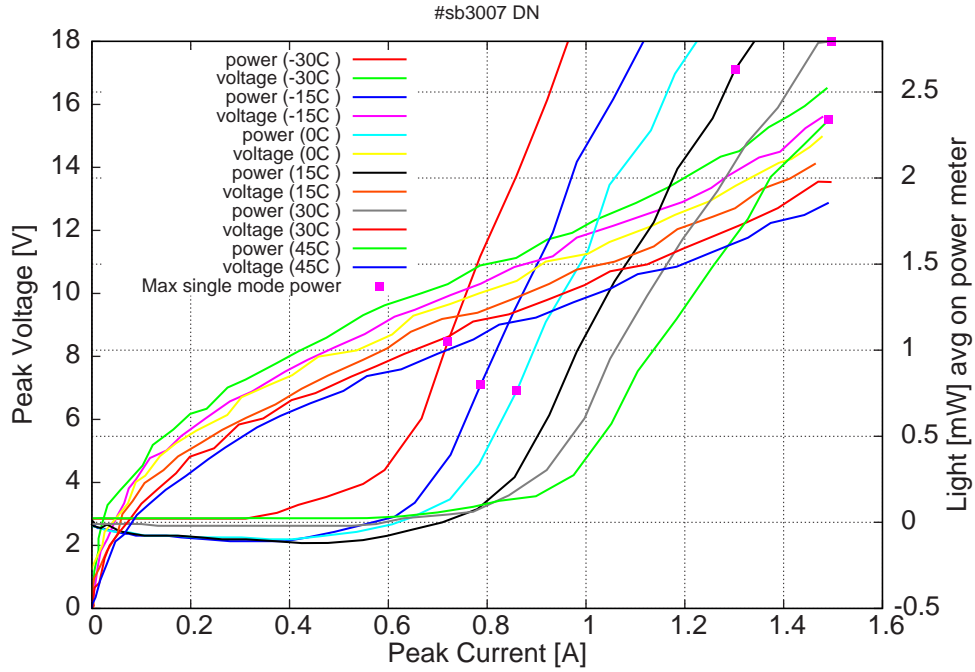


Figure 4: peak voltage and average power vs peak current at 2% duty-cycle (50ns pulses on the laser, 2.5 μ s period) (the solid squares indicate the maximum singlemode emitted power)

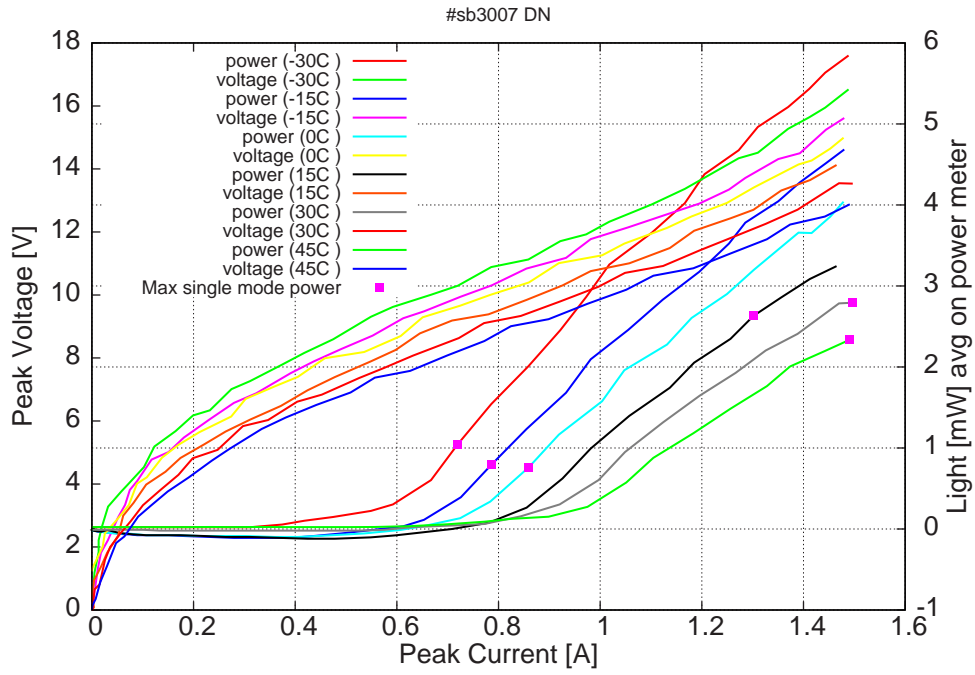


Figure 5: peak voltage and average power vs peak current at 2% duty-cycle (50ns pulses on the laser, $2.5\mu\text{s}$ period) (including the multimode region)

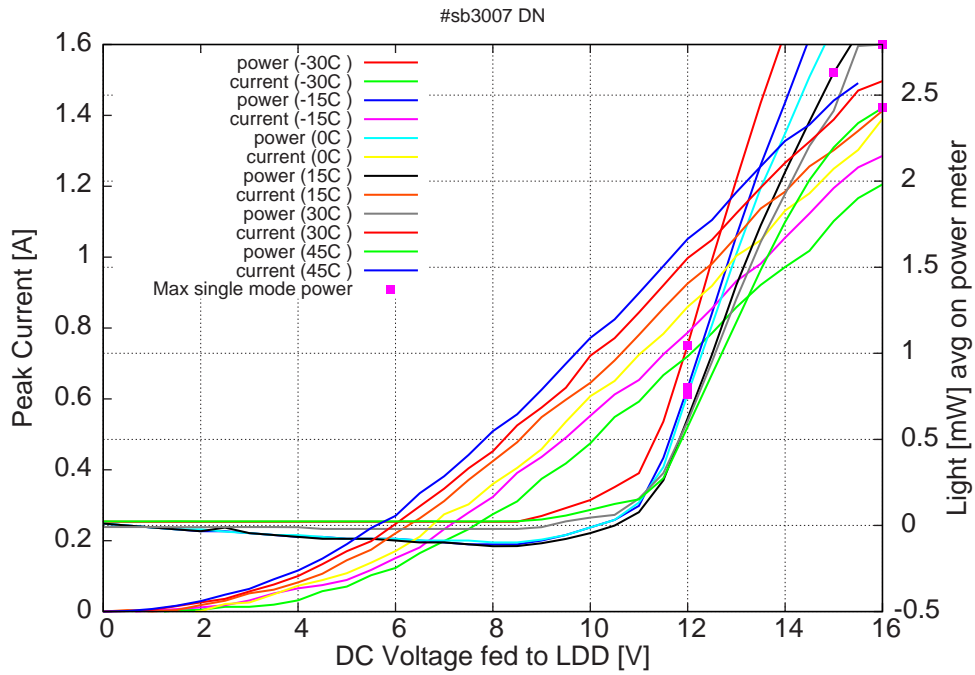


Figure 6: peak current and average power vs LDD voltage at 2% duty-cycle (50ns pulses on the laser, $2.5\mu\text{s}$ period) (the solid squares indicate the maximum singlemode emitted power)

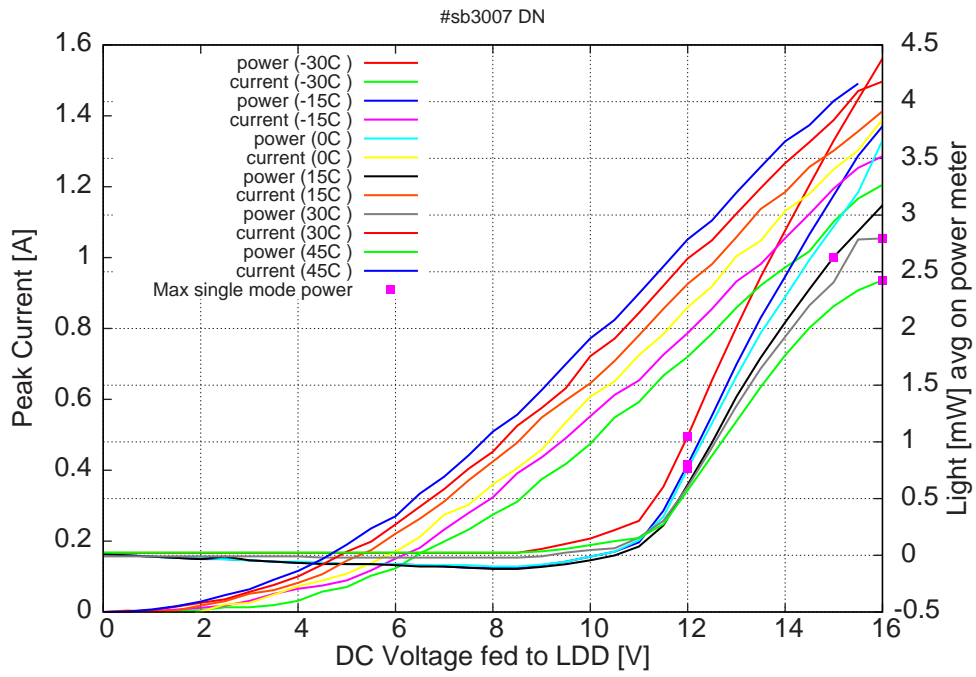
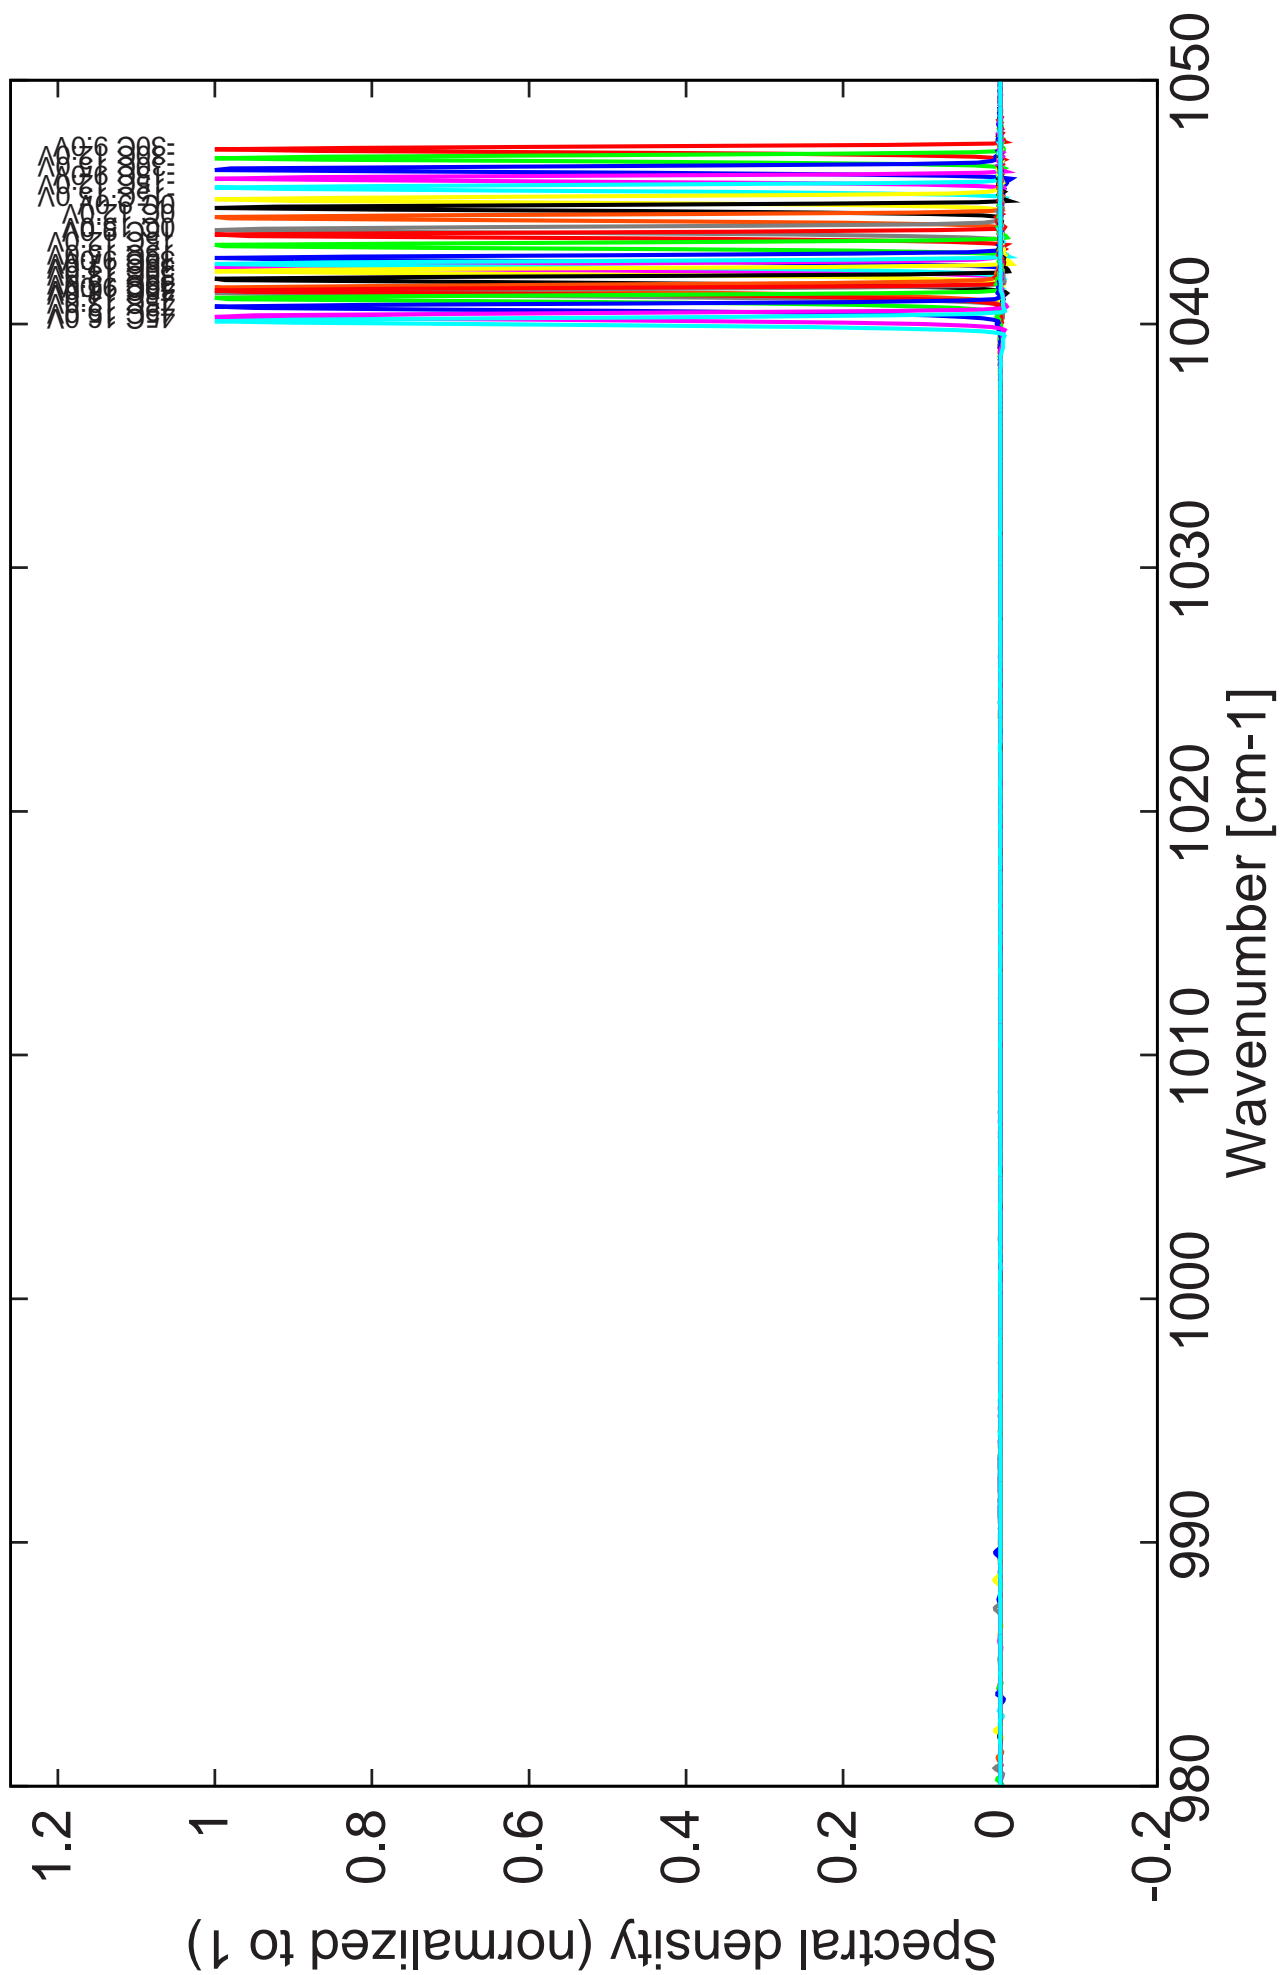


Figure 7: peak current and average power vs LDD voltage at 2% duty-cycle (50ns pulses on the laser, 2.5 μ s period) (including the multimode region)

Figure 6: spectra at different temperatures for various LDD voltages (22ns pulses, 1.1us period)



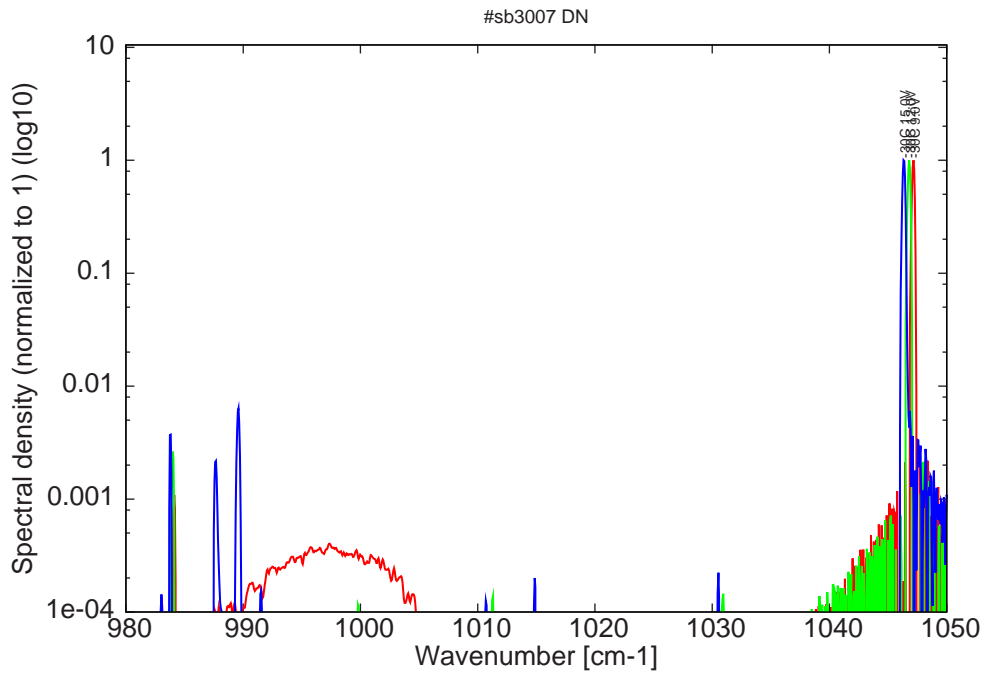


Figure 8: spectra at -30C for various LDD voltages (monomode up to 12V on LDD)

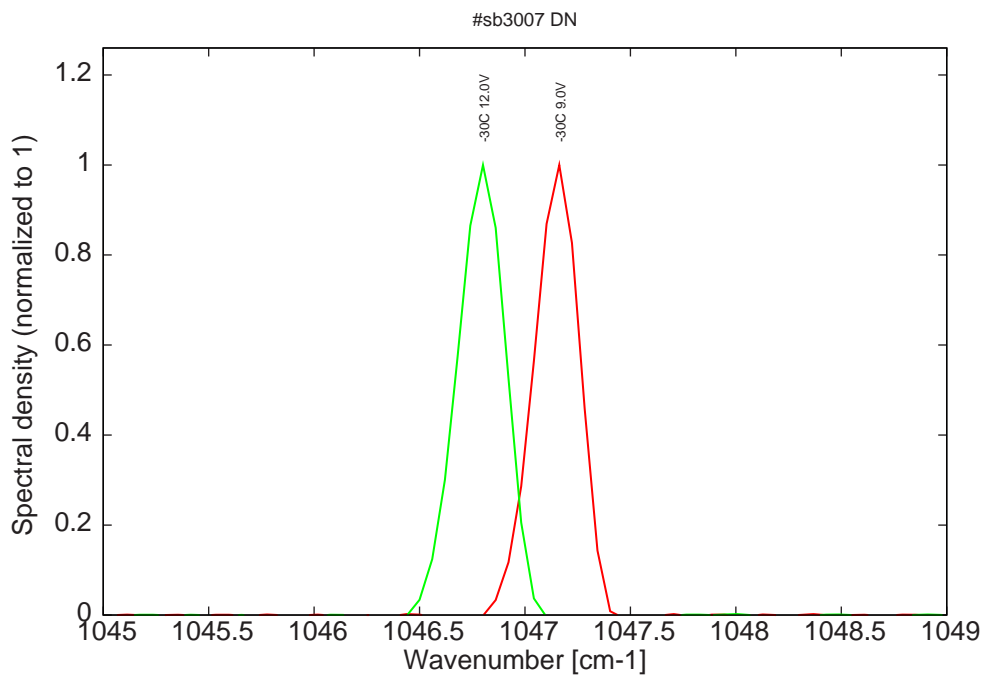


Figure 9: spectra at -30C for various LDD voltages (monomode range)

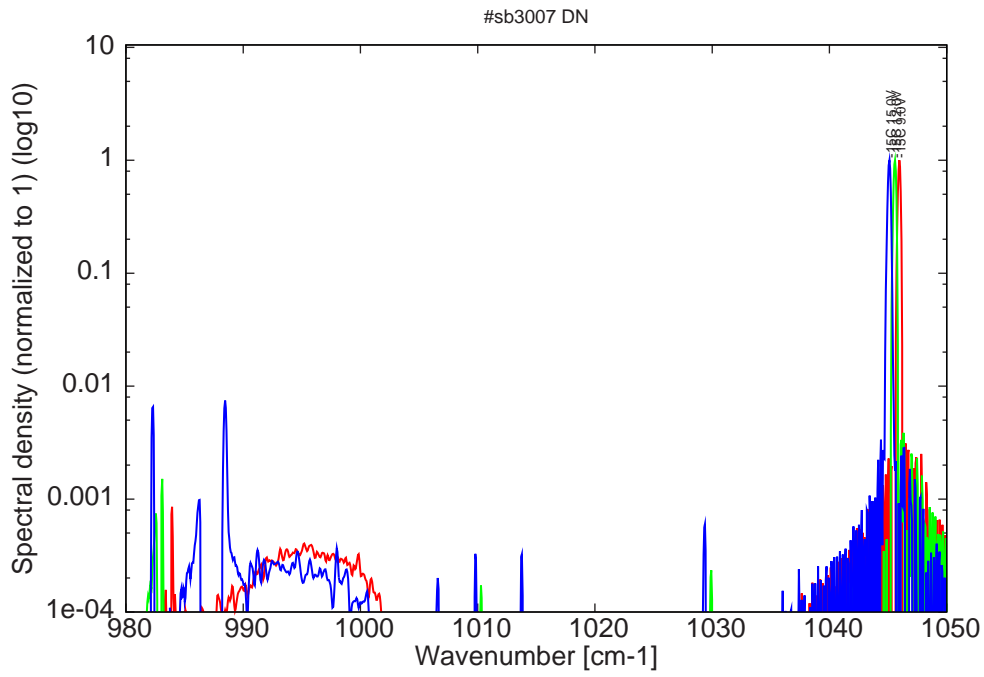


Figure 10: spectra at -15C for various LDD voltages (monomode up to 12V on LDD)

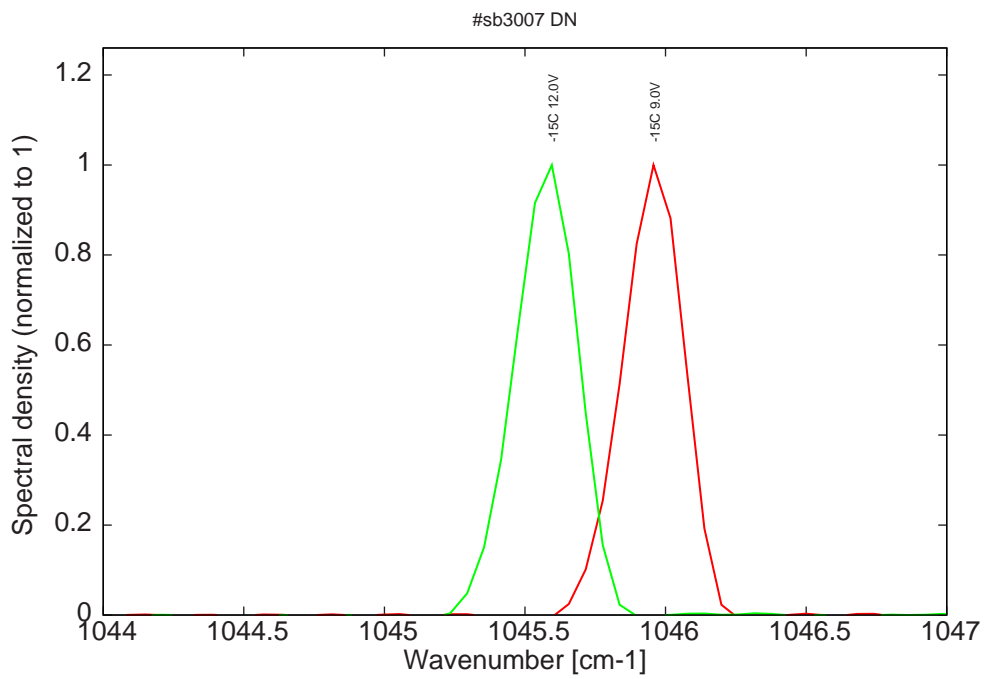


Figure 11: spectra at -15C for various LDD voltages (monomode range)

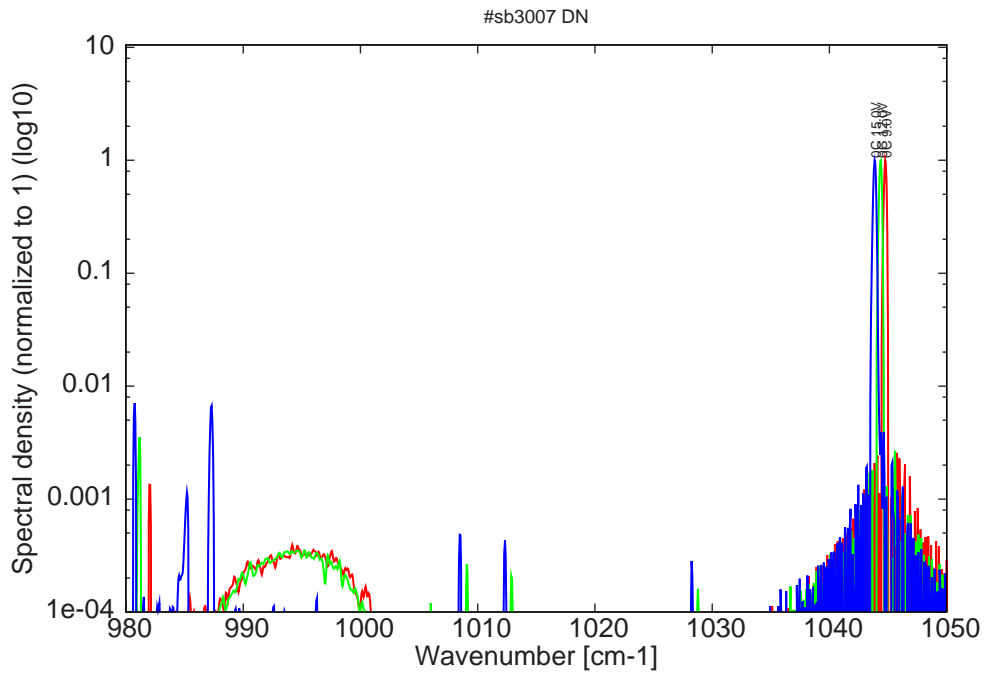


Figure 12: spectra at 0C for various LDD voltages (monomode up to 12V on LDD)

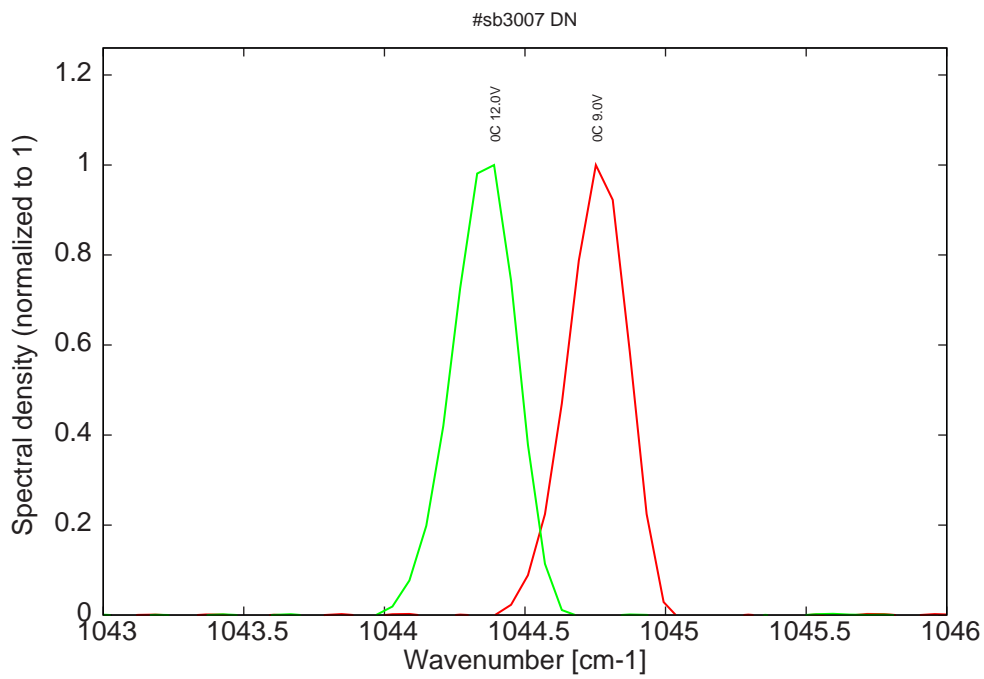


Figure 13: spectra at 0C for various LDD voltages (monomode range)

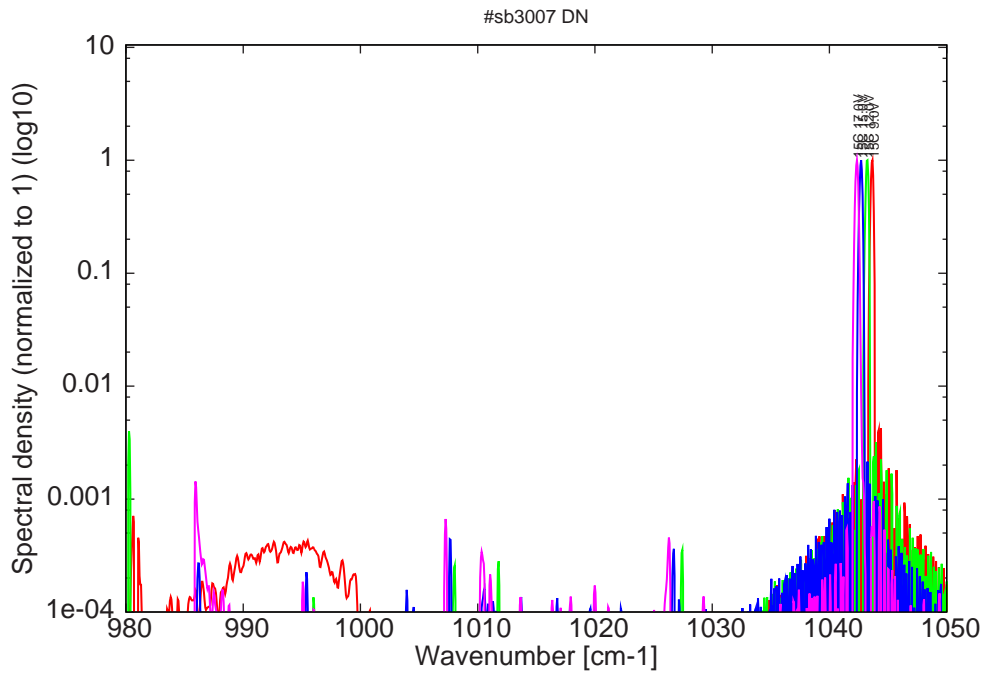


Figure 14: spectra at 15C for various LDD voltages (monomode up to 15V on LDD)

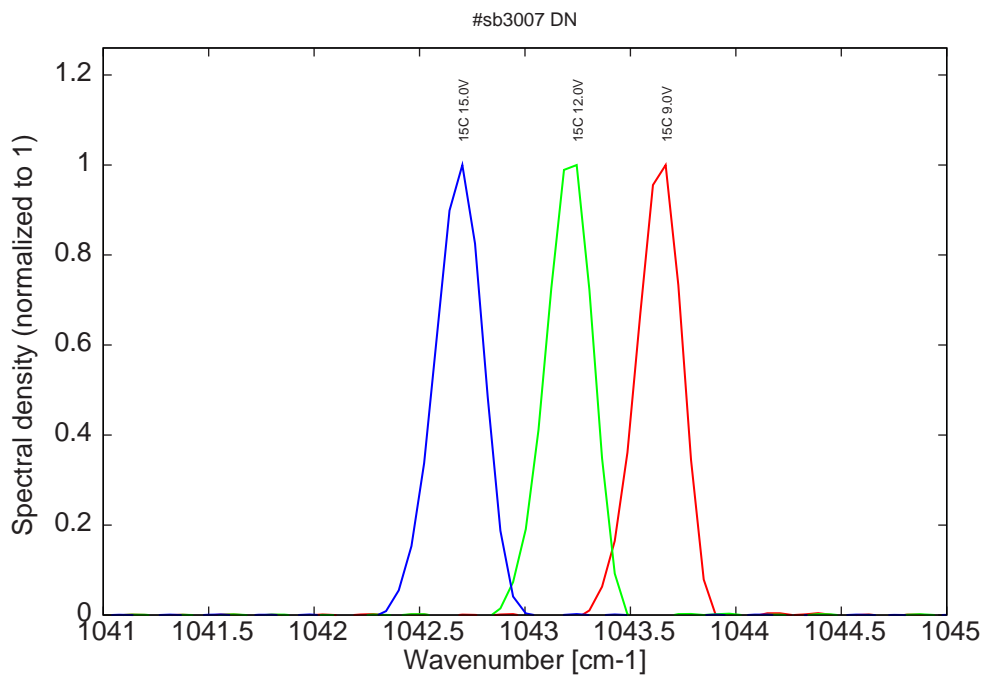


Figure 15: spectra at 15C for various LDD voltages (monomode range)

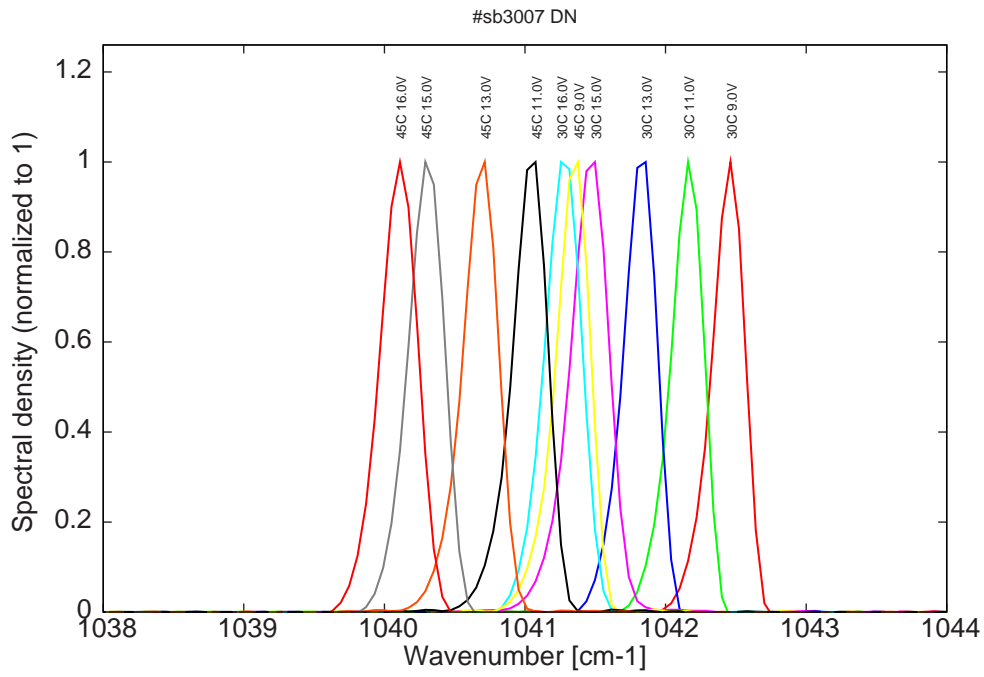


Figure 16: spectra at 30C and 45C for various LDD voltages (all monomode)

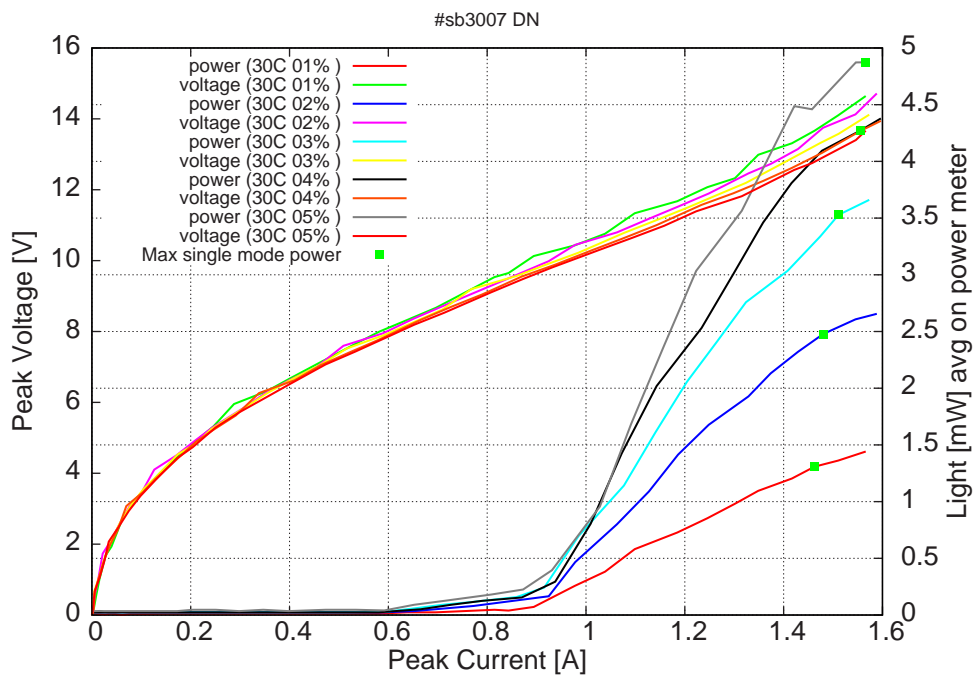


Figure 17: peak voltage and average power vs peak current at 30C for various duty-cycles (100ns pulses on the laser)

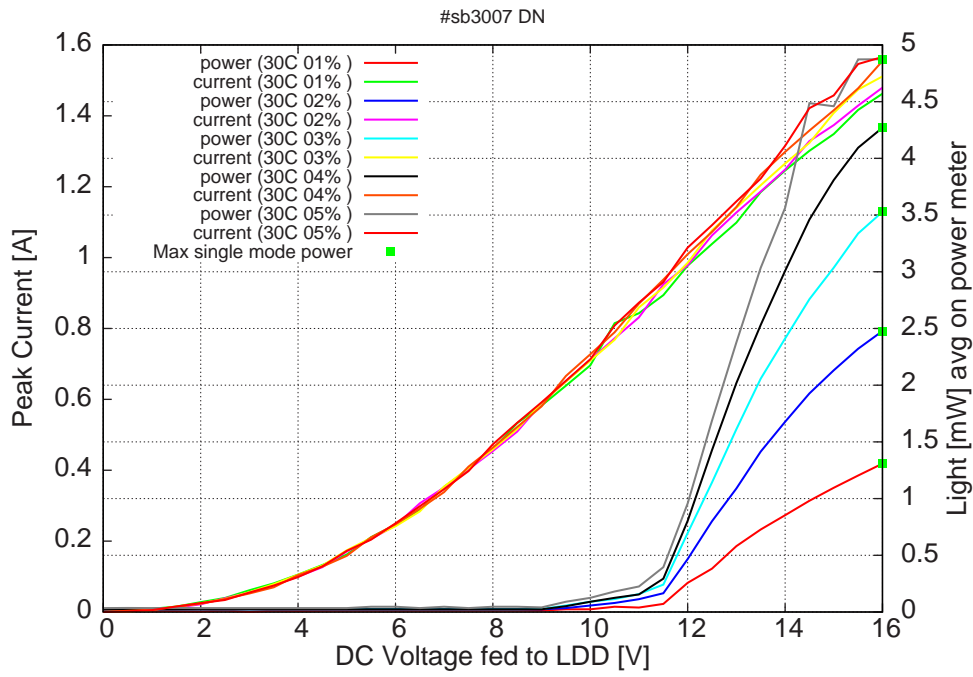


Figure 18: peak current and average power vs LDD voltage at 30C for various duty-cycles (100ns pulses on the laser)

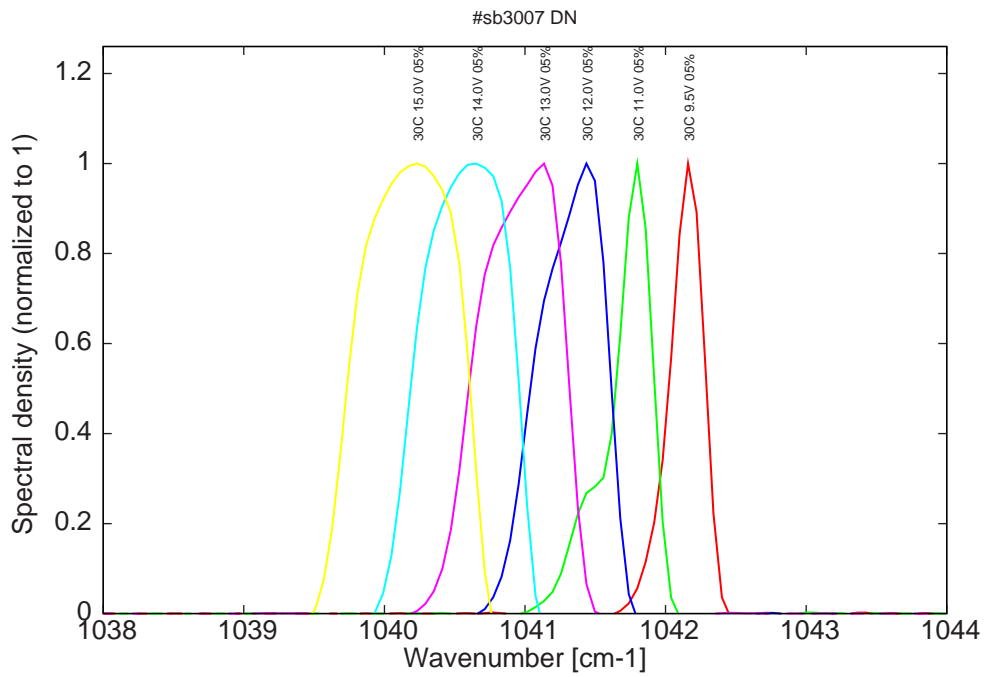


Figure 19: spectra at 30C at 5% duty-cycle for various LDD voltages (all monomode)